


DRAWINGS AND DIMENSIONS

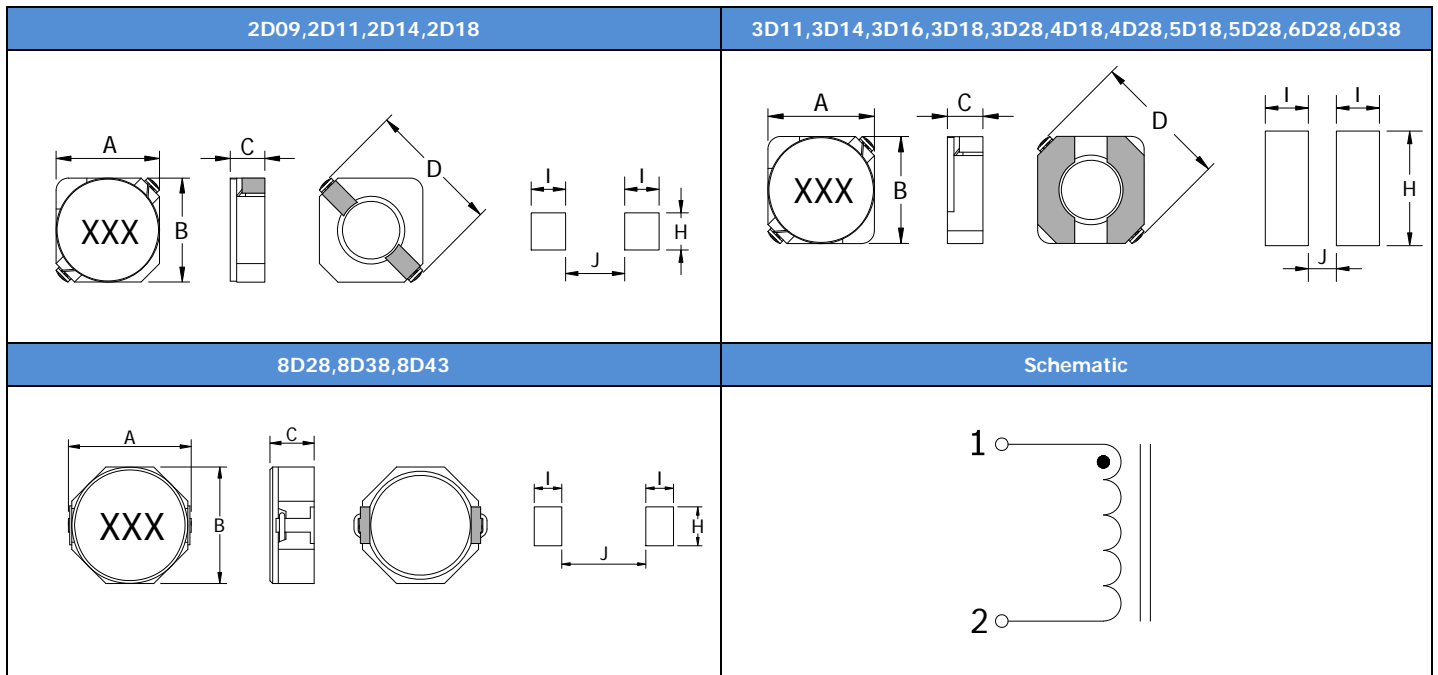

XXX = Inductance value

Case Size	Dimensions (mm)						
	A <sub>max</sub>	B <sub>max</sub>	C <sub>max</sub>	D <sub>typ</sub>	H <sub>ref.</sub>	I <sub>ref.</sub>	J <sub>ref.</sub>
1MD2D09	3.3	3.3	1.1	4.4	1.3	1.3	1.7
1MD2D11	3.3	3.3	1.3	4.4	1.3	1.3	1.7
1MD2D14	3.3	3.3	1.6	4.4	1.3	1.3	1.7
1MD2D18	3.3	3.3	2.1	4.4	1.3	1.3	1.7
1MD3D11	4.2	4.2	1.3	5.5	4.5	1.7	1.1
1MD3D14	4.2	4.2	1.6	5.5	4.5	1.7	1.1
1MD3D16	4.2	4.2	1.8	5.5	4.5	1.7	1.1
1MD3D18	4.2	4.2	2.1	5.5	4.5	1.7	1.1
1MD3D28	4.2	4.2	3.2	5.5	4.5	1.7	1.1
1MD4D18	5.0	5.0	2.0	6.9	5.3	1.9	1.5
1MD4D28	5.0	5.0	3.0	6.9	5.3	1.9	1.5
1MD5D18	6.0	6.0	2.0	8.2	6.3	2.1	2.0
1MD5D28	6.0	6.0	3.0	8.2	6.3	2.1	2.0
1MD6D28	7.0	7.0	3.0	9.5	7.3	2.6	2.0
1MD6D38	7.0	7.0	4.0	9.5	7.3	2.6	2.0
1MD8D28	10.1	8.3	3.0	/	2.8	2.0	6.1
1MD8D38	10.1	8.3	4.0	/	2.8	2.0	6.1
1MD8D43	10.1	8.3	4.5	/	2.8	2.0	6.1